


Product Specification

S26R2ZB

ZigBee Smart Plug

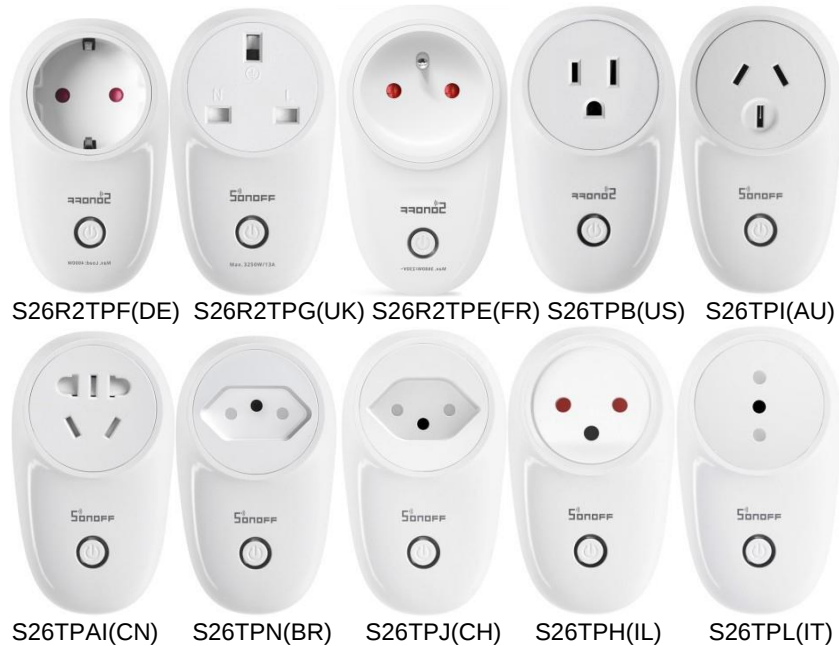

Basic Information

Product series	Smart Plugs
Type	Smart switch module
Voltage	S26R2TPF/S26R2TPE/S26R2TPG: 100-250V AC 50/60Hz S26TPI/S26TPAI/S26TPN/S26TPJ/S26TPH/S26TPL: 100-240V AC 50/60Hz
Max. Load	S26R2TPF: 16A/4000W S26R2TPE: 16A/3680W S26R2TPG: 13A/3250W S26TPB: 10A/1200W S26TPI/S26TPAI/S26TPN/S26TPJ/S26TPH/S26TPL: 10A/2200W
Use method	Plug and play
MCU	ESP8285(S26R2TPF/S26R2TPE/S26R2TPG ESP8266(S26TPB/S26TPI/S26TPAI/S26TPN/S26TPJ/S26TPH/S26TPL)
Certification	CE/FCC/RoHS

Appearance

Color	White
Dimension	97,5x56x35mm
Weight	85-107g
Casing material	PC

Features

Functions	Remote control, single/countdown timing, voice control, share control, smart scene, camera feature, Group control, LAN control
Operating systems	Android & iOS

Wireless Standard

Wi-Fi	IEEE 802.11 b/g/n 2,4 GHz(2400M – 2483,5)
Antenna	PCB board with antenna
Security mode	WPA/WPA2
Encryption type	WEP/TKIP/AES

Working Environment

Applicable place	Indoor
Working temperature	-10°C – 40°C
Working humidity	5%-95%RH, non condensing
Working height	Less than 2000m